


Data Sheet

OKTOPUS® GL-K300

Range of application:

Suitable for roof and wall installation of large-format glass and façade panels.



horizontal



manual rotation 360°, lockable in 45° intervals



vertical



manual tilting 90°

Description:

- crane attachment for use on industrial construction sites
- 2 independent vacuum circuits, each vacuum circuit with dual safety system and integrated reserve vacuum
- integrated gauge for monitoring the vacuum and power supply
- optical and acoustic alarm signalling deviations in nominal conditions
- powered by a high capacity rechargeable battery
- extension arms also permit handling of large-format panels
- fulfils DIN EN 13155 requirements

Typical application: Handling of glass panels in industrial construction.

The building panels to be processed: - must be air impermeable on the suction surfaces
- have a clean and even surface
- may not be covered by a protective film

Safe Working Load: 300 kg (4 suction cups \varnothing 400 mm)

Weight of device: approx. 85 kg


Controls: hand slide valve located directly on the device

Power supply: 24 V battery

Vacuum production: vacuum pump

Optional accessory: transport box

Dimensions:

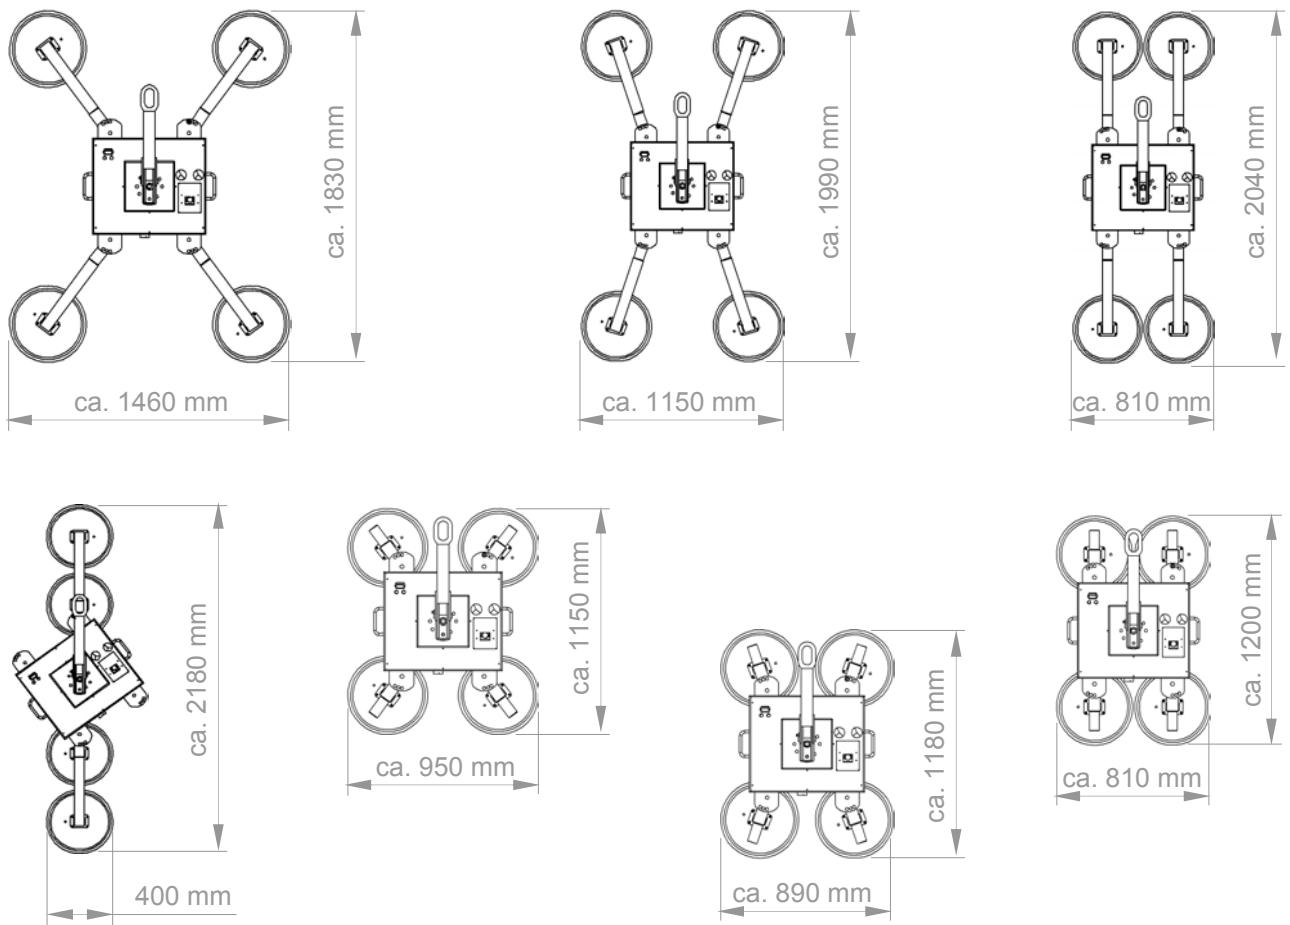

Photos:

